



Maximum permissible filling weight (for compressed gases filled by weight only)

Verification Body Logo


First Inspection Year/Month

Customizable logo area (Black and White)

M18x1,5 x,xxKG 2,0L PW300 at 15°C PT/PH450BAR	CTS XX/XXX/XXXXXXXX	UN XXXX Gas Name	 COMPOSITE TECHNICAL SYSTEMS Composite Technical Systems S.p.A Via Monsignor Faldutti, 9 33048 Chiopris Viscone (UD) ITALY www.ctscl.com
1370-40° EN 12245 I	yyyy/mm		
WARNINGS AVVERTENZE FILL IN ACCORDANCE WITH MANUFACTURER'S ISTRUZIONI THIS CYLINDER MUST NOT BE SUBJECTED TO A VACUUM RIEMPIRE SECONDO LE ISTRUZIONI DEL FABBRICANTE QUESTA BOMBOLA NON DEVE ESSERE SOTTOPOSTA A VUOTO		INSTRUCTIONS: 1) Valve screwing torque: 85 Nm 2) Before use, read carefully the user manual 3) Avoid storing without pressure	
FINAL:>NNL		RETESTING/RICOLLAUDO:	

Verification Body Number

Cylinder layout	Description and notes	Empty cylinder weight Aluminium alloy	Empty cylinder weight Stainless steel
Cylinder without finishings (bare cylinder)	Without finishings	1.34±0.09 kg 2.95±0.20 lbs	1.76±0.09 kg 3.88±0.20 lbs
Finished cylinder with transparent coating	Finished cylinder with transparent coating and rubber caps.	1.61±0.09 kg 3.55±0.20 lbs	2.03±0.09 kg 4.48±0.20 lbs
Finished cylinder with glass fiber coating	Finished cylinder with glass fiber coating and rubber caps.	1.65±0.09 kg 3.64±0.20 lbs	2.07±0.09 kg 4.56±0.20 lbs
Finished cylinder with yellow or black sleeve	Finished cylinder with coloured sleeve (black or yellow), transparent sleeve and rubber caps.	1.70±0.09 kg 3.75±0.20 lbs	2.12±0.30 kg 4.67±0.20 lbs

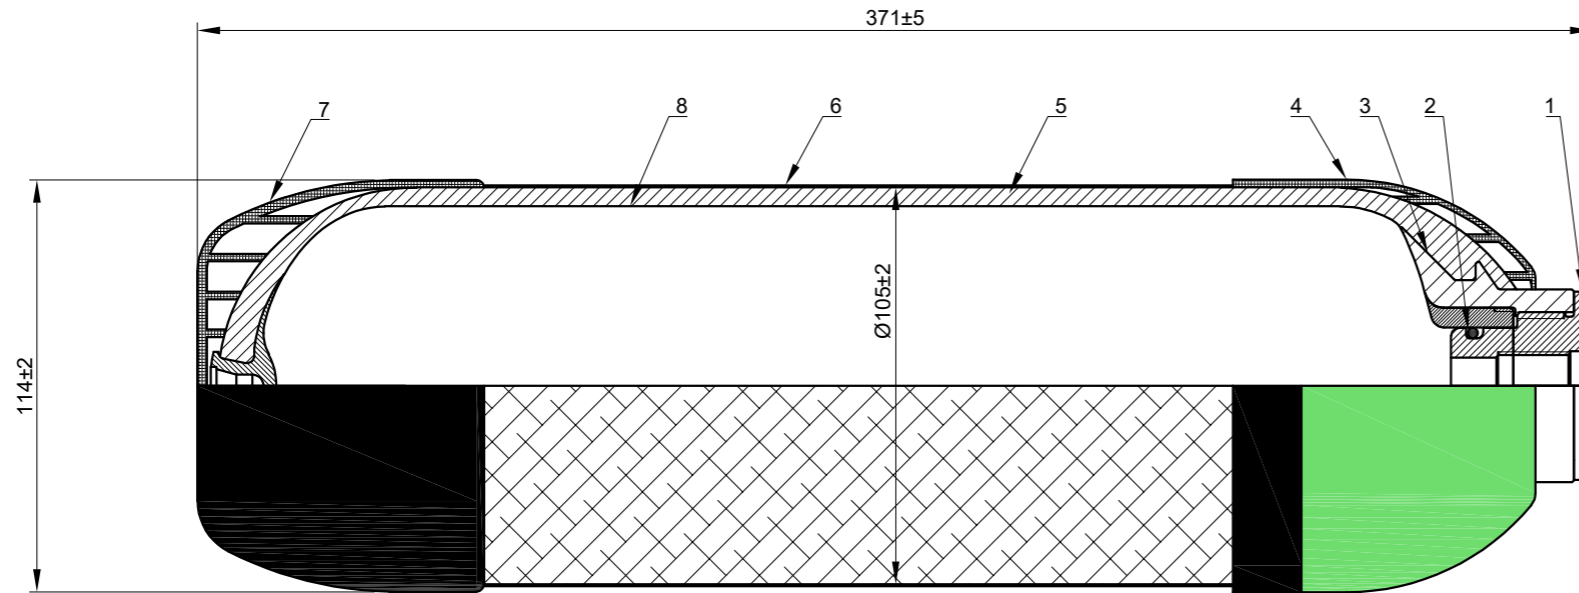

Legend:

① Inner boss (internal nozzle)

THREADS	
STANDARD THREAD	M18x1.5 - EN ISO 15245-1
OTHER COMMON THREADS	M25x2.0 - EN ISO 15245-1
	17E - EN ISO 11363-1

② O-ring

③ Outer boss (external nozzle)

④ Colour coded upper rubber cap

⑤ Composite stratification layer

⑥ Optional exterior finishing

⑦ Bottom rubber cap

⑧ Internal PET liner

CTS SpA Type 4 cylinders Data Sheet:  
2.0 lt 300 bar Technical Gases

Working pressure: 300 bar (4361 psi)	Boss (nozzles) material: Anodized aluminum alloy OR Stainless steel
Test pressure: 450 bar (6527 psi)	Liner material: PET
Min. design burst pressure: >900 bar (13053 psi)	Reinforcement material: Carbon fiber + Epoxy resin
Water capacity: 2.0 L (122.04 cu. inch)	Exterior finishing: Customer specifications
Service life: non limited (NLL) according to EN 12245:2009 + A1:2011	Approved gases: UN 1002 Air, compressed; (green upper cap) UN 1013 Carbon Dioxide, compressed; (gray upper cap) UN 1066 Nitrogen, compressed; (black upper cap) UN 1046 Helium, compressed; (brown upper cap) UN 1006 Argon, compressed. (green upper cap)
Specifications: EN 12245:2009 + A1:2011; European Directive TPED 2010/35/UE; ADR 2017	



The image has the only purpose to represent the product.